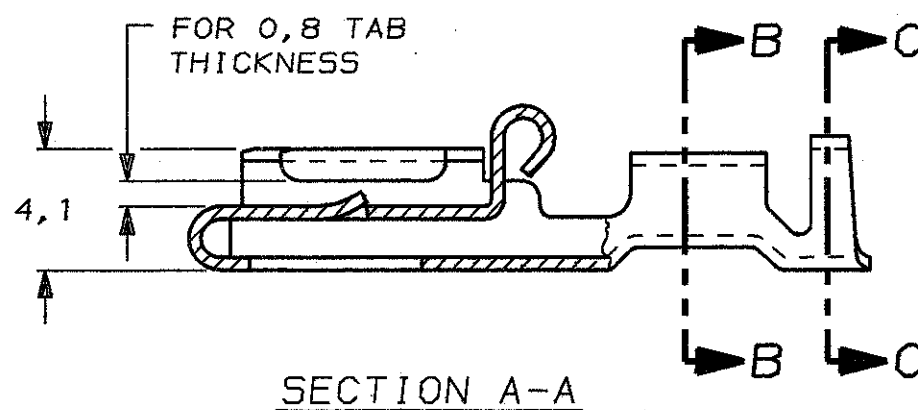
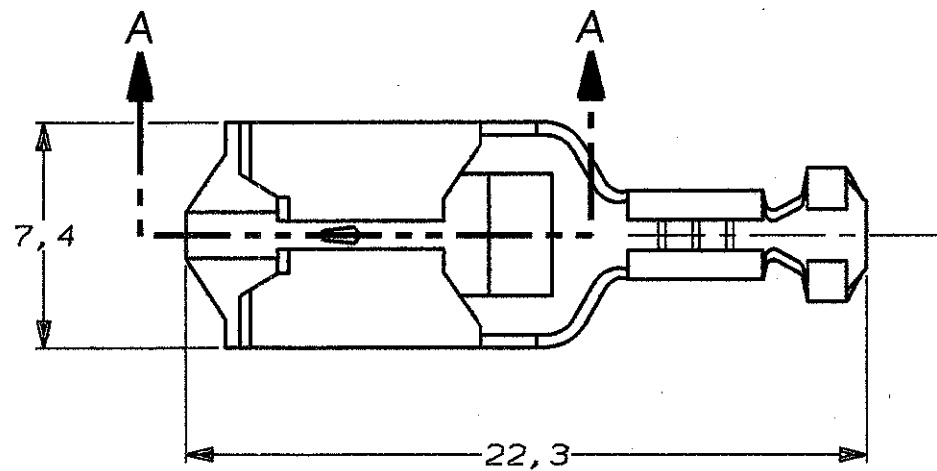




DO NOT SCALE

DIMENSIONS IN mm


METRIC

THIRD ANGLE
PROJECTION



SECTION A-A



SECTION B-B



SECTION C-C

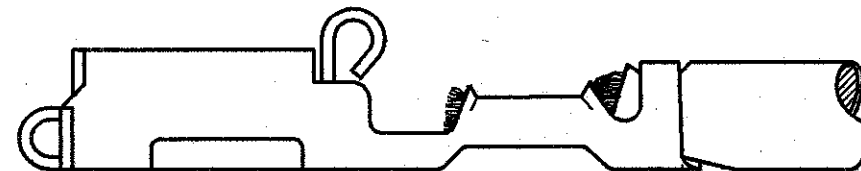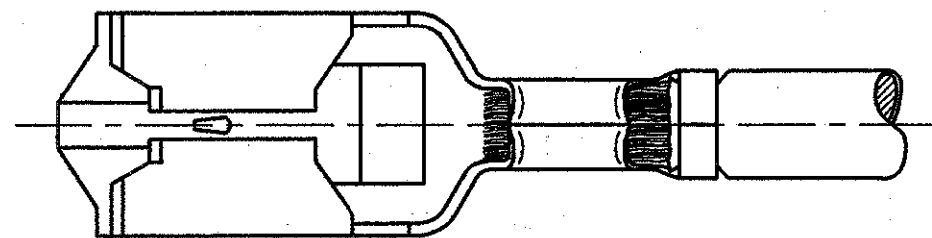

0,25 MAX CUT OFF

WIRE RANGE :
0,7-2,0 mm²INSULATION RANGE :
2,4-3,2 DIA.

STRIP VERSION	FINISH	MATERIAL	PARTNUMBER
154718-7	PRE-TINPLATED	PHOSPHORBRONZE	0-341002-7
154718-6	PRE-TINPLATED	BRASS	0-341002-6
154718-4	TINPLATED	PHOSPHORBRONZE	0-341002-4
154718-3	TINPLATED	BRASS	0-341002-3
154718-2	UNPLATED	PHOSPHORBRONZE	0-341002-2
154718-1	UNPLATED	BRASS	0-341002-1

-	-	-	-	-	CUSTOMER DRAWING		FOR REFERENCE ONLY WILL NOT BE UPDATED	
-	-	-	-	-	© COPYRIGHT 19- BY AMP HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.			
-	-	-	-	-	THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION _____, 19 _____			
-	-	-	-	-	AMP		AMP HOLLAND B.V. 's-Hertogenbosch, The Netherlands.	
-	-	-	-	-	NAME			
-	-	-	-	-	POSITIVE LOCK RECEPTACLE .250 (6,35) SERIES (LOOSE PIECE)			
LTR.	REVISION RECORD		DR.	CHK.	DATE			
DR. : L.V.D.HEIJDEN	CHK. : A.BIJNEN		APP. : 	-		DWG. No.	REV. LTR.	SHEET
DATE, 01 MAR 1992	DATE, -		DATE,  5-3-92			C-341002	0	1 OF 1
								A3