

2600 series

Power rocker switches



DISTINCTIVE FEATURES

Three rocker shapes : plain, V-shaped or concave

Various rocker colors

Frame with protection guard on 2600LP models

Illuminated or non-illuminated

UL, CE marking for low voltage directive 2014/35/UE and NF (EN 61058-1) approved



ELECTRICAL SPECIFICATIONS

- Max. current/voltage rating with resistive load and approved ratings : see table below.
- Initial contact resistance : 10 mΩ max.
- Insulation resistance : 1,000 MΩ min. at 500 VDC
- Dielectric strength : 2,500 Vrms 50 Hz min. between terminals
3,000 Vrms 50 Hz min. between terminals and metal panel
- Electrical life : 10,000 cycles at full load

Functions	APPROVED RATINGS		DIRECT CURRENT	
	UL	NF	24 VDC	12 VDC
	UL 61058	EN 61058-1		
ON - OFF ON - ON	10(4) A 250 VAC T55'	-	10 A	15 A
ON - OFF - ON	10(4) A 250 VAC T55'	L I option 10(4) A 250 VAC	8 A	10 A
ON - ON - ON	-	-	5 A	8 A
OTHERS	-	L I option 10(4) A 250 VAC	8 A	10 A



GENERAL SPECIFICATIONS

- Panel thickness : 0.8 mm to 4 mm (.031 to .157)
- Operating temperature :
 - silver contacts (A) : -20 °C to +85 °C (-4 °F to +185 °F)
 - silver plated contacts (C) : -10 °C to +55 °C (+14 °F to +131 °F)

The company reserves the right to change specifications without notice.



2600 series

Power rocker switches



MATERIALS

- Case : melamine/polyester
- Frame : polyamide
- Actuator : polyamide
- Contacts :
A : silver
C : copper, silver plated

AGENCY APPROVALS



UL 61058-1



LI only
EN 61058-1




2014/35/UE

Availability : consult factory for details of approved models.


Marking : approved models are standard marked.




TERMINALS



Screw




Solder lug / quick-connect




Normalized quick-connect



ELECTRICAL FUNCTIONS



PANEL CUT-OUT



2600 series

Power rocker switches



BUILD YOUR PART NUMBER

BASIC PART NUMBER

SERIES	NUMBER OF POLES	ELECTRICAL FUNCTIONS	TERMINALS
26			
	3 Single pole 4 Double pole	1 ON - OFF 4 ON ON ON ▲ 5 MOM - ON 6 ON - ON 7 MOM OFF MOM 8 ON OFF MOM 9 ON OFF ON	(none) Screw + clamp /2 Solder lugs / quick-connect /3 Normalized quick-connect
		▲ double pole only	
			FRAME TYPE
			LH Plain LP With protection guard

OPTIONS

CONTACT MATERIALS	FRAME COLORS	ROCKER SHAPES	ROCKER MARKING	ILLUMINATED WINDOW	LAMPS
A Silver C Copper, silver plated (functions 1, 6 and 9 only)	1 dark blue 2 black (standard) 4 grey 7/1 white 8 chrome plated B light brown E dark brown	1 Plain 2 V-shaped 3 Concave	Black White 00 00 (none) 01 21 O — 07 27 O I 08 28 ON OFF Complete table at the end of the series.	/3 green /6 red With green, use fluorescent lamp only.	L0 Without lamp L6V 6 V filament lamp L12V 12 V filament lamp L24V 24 V filament lamp L110V 110 VAC neon lamp L110V1 110 VAC blue fuor. lamp L110V3 110 VAC green fuor. lamp L220V 220 VAC neon lamp L220V1 220 VAC blue fuor. lamp L220V3 220 VAC green fuor. lamp
			ROCKER COLORS		
			Illuminated rocker (without window) 0 Without rocker 1 blue 3 green 5 yellow 6 red 7/1 white 9 orange With green or blue rocker, use fluorescent lamp only.		
			Non-illuminated rocker or rocker with illum. window • 0 Without rocker 02 light brown 04 dark brown 03 beige 10 blue 14 dark blue 20 black • 30 green • 40 grey 50 yellow 60 red • 70 white 90 orange		
					L I OPTION
					L I EN 61058-1 approved version, without lamp (3 position switches)

NOTICE : please note that not all combinations of above numbers are available. Refer to the following pages for further information.

2600 series


Power rocker switches

2600LH - SINGLE POLE



Screw term. + clamp	Solder lug/ quick-connect	III A2-A1	II	I A2-A3
2631LH	2631LH/2	ON	-	OFF
2635LH	2635LH/2	MOM	-	ON
2636LH	2636LH/2	ON	-	ON
2637LH	2637LH/2	MOM	OFF	MOM
2638LH	2638LH/2	ON	OFF	MOM
2639LH	2639LH/2	ON	OFF	ON


Shown with plain rocker

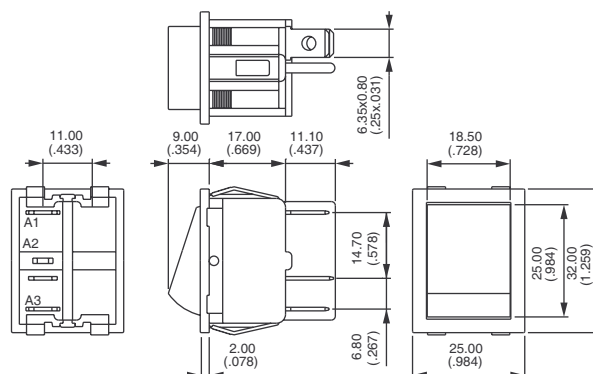

2600LH - DOUBLE POLE



Screw term. + clamp	Solder lug/ quick-connect	III A2-A1 B5-B4	II	I A2-A3 B5-B6
2641LH	2641LH/2	ON	-	OFF
2644LH*	2644LH/2*	ON	ON	ON
2645LH	2645LH/2	MOM	-	ON
2646LH	2646LH/2	ON	-	ON
2647LH	2647LH/2	MOM	OFF	MOM
2648LH	2648LH/2	ON	OFF	MOM
2649LH	2649LH/2	ON	OFF	ON

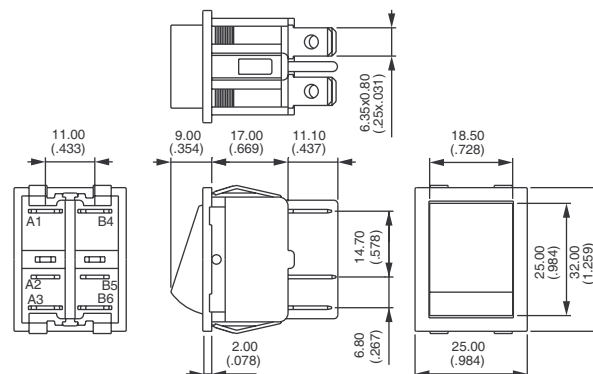


*Function 4 : SP in DP case, see "Technical information" on website.

2600LP - WITH PROTECTION GUARD SINGLE POLE




Screw term. + clamp	Solder lug/ quick-connect	III A2-A1	II	I A2-A3
2631LP	2631LP/2	ON	-	OFF
2635LP	2635LP/2	MOM	-	ON
2636LP	2636LP/2	ON	-	ON
2637LP	2637LP/2	MOM	OFF	MOM
2638LP	2638LP/2	ON	OFF	MOM
2639LP	2639LP/2	ON	OFF	ON

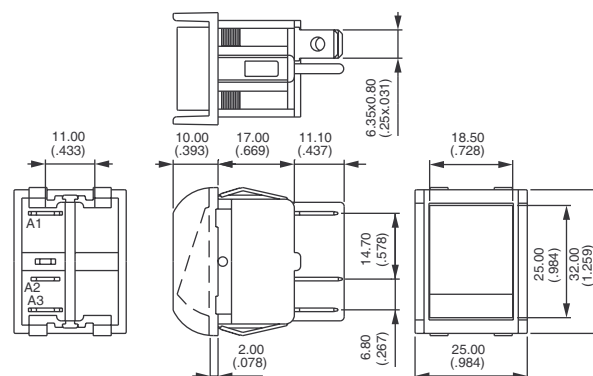

2600LP - WITH PROTECTION GUARD DOUBLE POLE



Screw term. + clamp	Solder lug/ quick-connect	III A2-A1 B5-B4	II	I A2-A3 B5-B6
2641LP	2641LP/2	ON	-	OFF
2644LP*	2644LP/2*	ON	ON	ON
2645LP	2645LP/2	MOM	-	ON
2646LP	2646LP/2	ON	-	ON
2647LP	2647LP/2	MOM	OFF	MOM
2648LP	2648LP/2	ON	OFF	MOM
2649LP	2649LP/2	ON	OFF	ON

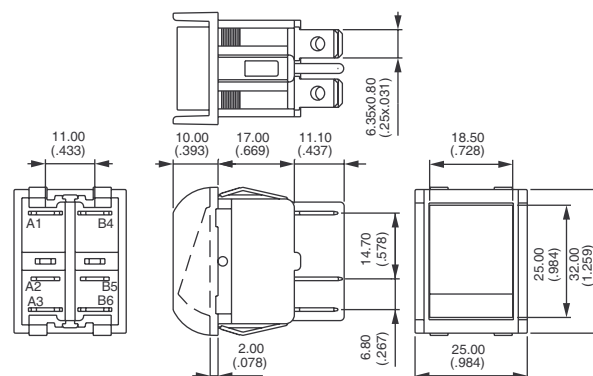

*Function 4 : SP in DP case, see "Technical information" on website.

2600 series


Power rocker switches

TERMINAL OPTION

Specify after LH or LP.


/3 Normalized quick-connect terminals 6.35 x 0.8 (.250 x .031)

CONTACT MATERIALS




- A Silver
- C Copper, silver plated (available with functions 1, 6 and 9 only)

FRAME COLORS




- 1 Dark blue
- 2 Black (standard)
- 4 Grey
- 7/1 White/natural
- 8 Chrome plated (⚠ Crome plated option has UL approval only.)
- B Light brown
- E Dark brown


FRAME COLORS




- 1 Plain
- 2 V-shaped
- 3 Concave



1



2



3

ROCKER COLORS




FOR ILLUMINATED SWITCHES

		Plain rocker P/N	V-shaped rocker P/N	Concave rocker P/N
0	Without rocker	-	-	-
1	Blue*	U881	U861	U871
3	Green*	U883	U863	U873
5	Yellow	U885	U865	U875
6	Red	U886	U866	U876
7/1	white	U887	U867	U877
9	Orange	U889	U869	U879

* With green or blue rocker, use fluorescent lamp only.

2600 series


Power rocker switches

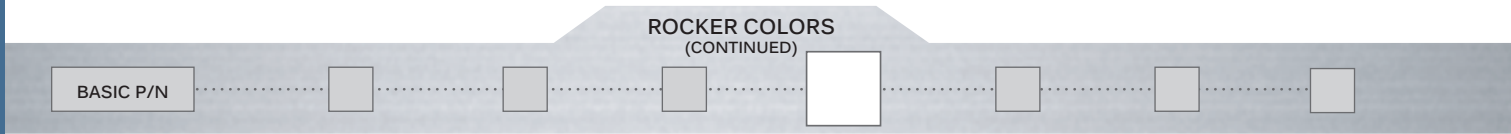

FOR NON-ILLUMINATED SWITCHES OR SWITCHES WITH ILLUMINATED WINDOW (•)

		Plain rocker P/N	V-shaped rocker P/N	Concave rocker P/N
0	Without rocker	-	-	-
02	Light brown	U1250B	U1270B	U1260B
04	Dark brown	U1250BF	U1270BF	U1260BF
03	Beige	U1250	U1270B	U1260B
10	Blue	U1251	U1271	U1261
14	Dark blue	U1251/4	U1271/4	U1261/4
20 •	Black	U1252	U1272	U1262
30 •	Green	U1253	U1273	U1263
40	Grey	U1254	U1274	U1264
50	Yellow	U1255	U1275	U1265
60 •	Red	U1256	U1276	U1266
70	White	U1257	U1277	U1267
90	Orange	U1259	U1279	U1269

Complete box with one of above color codes.
 To order rockers separately, use their P/N (U....) and complete box with code 0.
 Rockers with illuminated windows (codes 20, 30, 60) : part numbers on request.

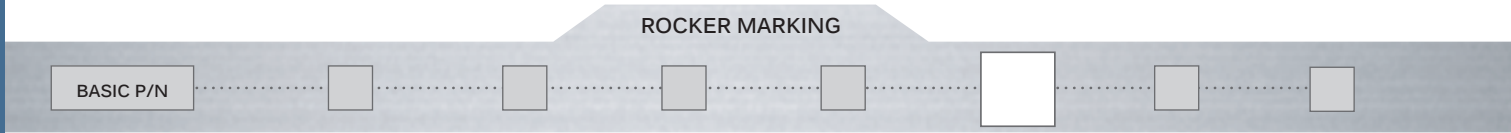

MARKING		4 1	4 1	4 1	4 1	4 1	4 1	3 6	4 1	4 1	4 1	4 1
COLOR		5 2	5 2	5 2	5 2	5 2	5 2	2 5	5 2	5 2	5 2	5 2
	-	6 3	6 3	6 3	6 3	6 3	6 3	1 4	6 3	6 3	6 3	6 3
Black	00	01	02	06	07	08	03	04	05*	40	43*	46
Red	00	11	12	16	17	18	13	14	15*	41	44*	47
White	00	21	22	26	27	28	23	24	25*	42	45*	48

* Not available on V-shaped rockers
 Special markings and marking on rockers with illuminated window : consult factory.


2600 series

Power rocker switches

LAMP

BASIC P/N

- L0 Non-illuminated switch
- L6V Filament lamp 6 V
- L12V Filament lamp 12 V
- L24V Filament lamp 24 V
- L110V Neon lamp 110 VAC
- L110V1 BLUE fluorescent lamp 110 VAC
- L110V3 Green fluorescent lamp 110 VAC
- L220V Neon lamp 220 VAC
- L220V1 BLUE fluorescent lamp 220 VAC
- L220V3 Green fluorescent lamp 220 VAC
- L I EN61058-1 approved version without lamp (3 position switches)




⚠ For illuminated models, the lamp is always connected between center terminals 2 and 5.

ILLUMINATED WINDOW

BASIC P/N

For black, green and red rockers only.

- /3 Green
- /6 Red



With green, use fluorescent lamp only.
No marking available on illuminated windows.