


BNC plug

crimp type

for cable up to Ø 2,8mm

Teflon insulation

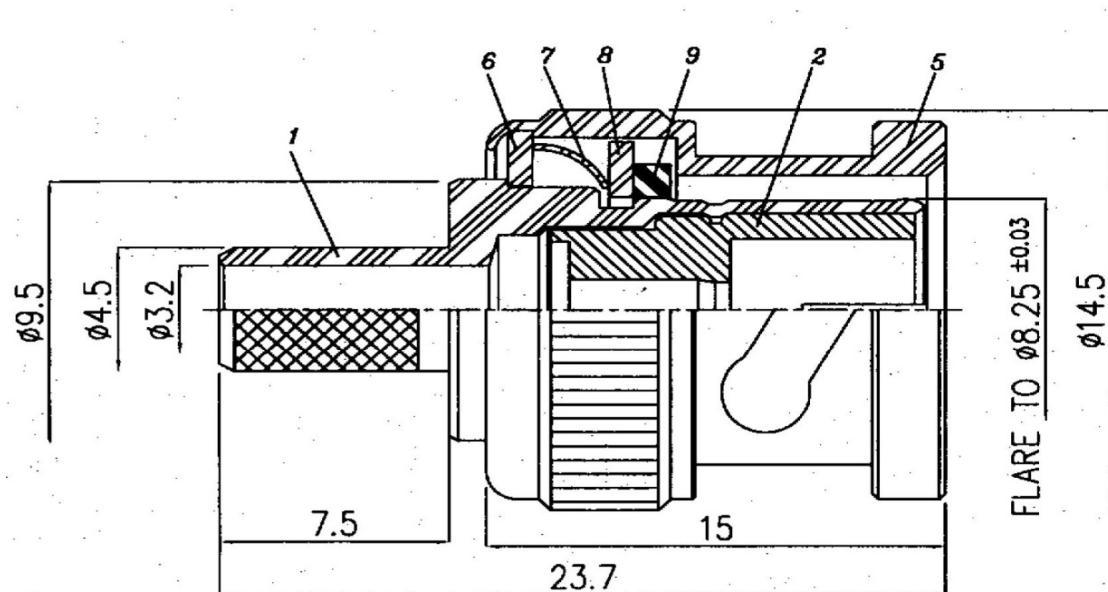

NO	DESCRIPTION	Q'TY	MATERIAL	PLATING
1	BODY	1	BRASS	NICKEL 100µ"MIN.
2	DIELECTRIC	1	DELFIN	-
3	CENTER PIN	1	BRASS	GOLD 3-5µ"MIN.
4	FERRULE	1	BRASS	NICKEL 100µ"MIN.
5	SHELL	1	BRASS	NICKEL 100µ"MIN.
6	WASHER	1	BRASS	NICKEL 100µ"MIN.
7	WASHER	1	SMS HIGH CARBON STEEL	NICKEL 100µ"MIN.
8	RETAINING RING	1	BRASS	NICKEL 100µ"MIN.
9	GASKET	1	RUBBER	-
10	REDUCER	1	TEFLON	-

NGT:

1st N is Nickel for body.




2nd G is Gold for pin.

3rd T is PTFE for insulation.

Unit: mm

Tolerance:

0-0.5mm ± 0.10mm	0.5-8mm ± 0.20mm
8-30mm ± 0.40mm	30-120mm ± 0.50mm

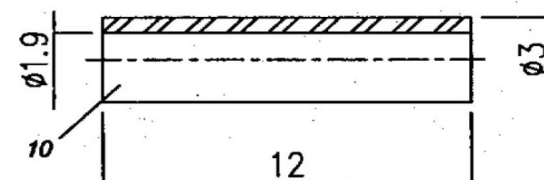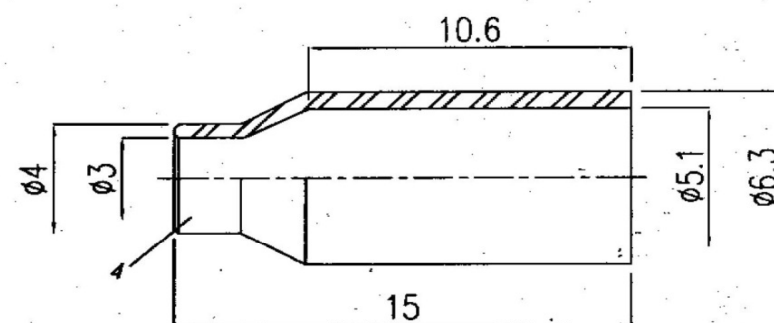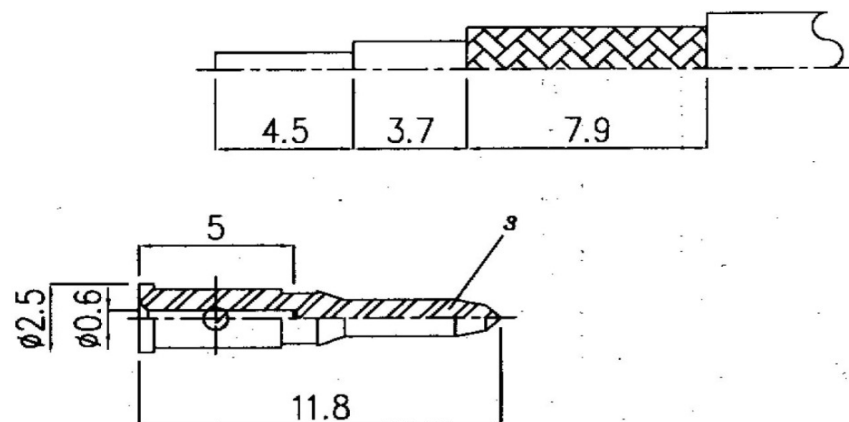

All material in accordance with RoHS!

Prep.:	Date:	Rev.:	Date:	Remark:	Prep.:	Check.:	Item No.:
J.A.	28.07.11						
Check.:	Date:						Customer Item No.:
							EAN Bar Code:
Approv.:							All rights reserved
							Page 1 of 1