


Pozi flat countersunk head machine screws form Z

BN 30505

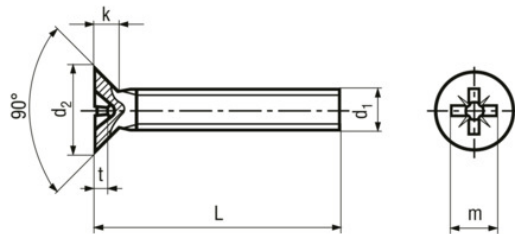

Standard	DIN 965 A (Standard withdrawn), ~ISO 7046-1, ~UNI 7688, ~ČSN 021152
Additional information	All lengths fully threadedCountersink must be designed according to the corresponding standard!
Headform	Countersunk head 90°
Drive	Cross recess Z (Pozidriv)
Thread	fully threaded
Material	Steel
Property class	4.8
Surface	zinc plated black

Article no.	d1	L	d2 max.	k max.	Pozidriv	m~	t min.	t max.
3441818	M3	4	5,6	1,65	1	2,8	1,48	1,73
5401299	M3	5	5,6	1,65	1	2,8	1,48	1,73
5002397	M3	6	5,6	1,65	1	2,8	1,48	1,73
5401300	M3	8	5,6	1,65	1	2,8	1,48	1,73
5401301	M3	10	5,6	1,65	1	2,8	1,48	1,73
5401302	M3	12	5,6	1,65	1	2,8	1,48	1,73
5002036	M3	16	5,6	1,65	1	2,8	1,48	1,73
5401303	M4	6	7,5	2,2	2	4	1,6	2,06
5401304	M4	8	7,5	2,2	2	4	1,6	2,06
5401305	M4	10	7,5	2,2	2	4	1,6	2,06
5401306	M4	12	7,5	2,2	2	4	1,6	2,06
5401307	M4	16	7,5	2,2	2	4	1,6	2,06
5401308	M5	8	9,2	2,5	2	4,4	2,05	2,51
5401309	M5	10	9,2	2,5	2	4,4	2,05	2,51

Article no.	d1	L	d2 max.	k max.	Pozidriv	m~	t min.	t max.
5401310	M5	12	9,2	2,5	2	4,4	2,05	2,51
5401311	M5	16	9,2	2,5	2	4,4	2,05	2,51
8274762	M5	20	9,2	2,5	2	4,4	2,05	2,51
8274797	M5	40	9,2	2,5	2	4,4	2,05	2,51
8274800	M5	50	9,2	2,5	2	4,4	2,05	2,51