

Device connector, rear mounting - RC-07P1N8AE000 - 1594472

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Device connector for rear wall, straight, shielded: yes, Screw locking, M23, Number of positions: 7, Type of contact: Male connector, Crimp connection, Radial O-ring, 4xM3, Panel thickness min.: 3 mm, Panel thickness max.: 10.5 mm

The figure shows the 17-pos. product version



Key Commercial Data

Packing unit	1 pc
Custom tariff number	85366990
Country of origin	Germany

Technical data

Product type	Circular connectors (device side)
Approval	EAC
Number of positions	7
Coding	N
Type	Device connector for rear wall
Mounting type	4xM3
Rated current (IEC)	20
Rated voltage (IEC)	300
Thread	M23
Shielding	yes
Signal type	Signal

Classifications

eCl@ss

eCl@ss 4.0	272607xx
------------	----------

Device connector, rear mounting - RC-07P1N8AE000 - 1594472

Classifications

eCl@ss

eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260708
eCl@ss 7.0	27440312
eCl@ss 8.0	27440103
eCl@ss 9.0	27440102

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC001121
ETIM 5.0	EC002641

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	43201404

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approvals submitted


Approval details

EAC


Drawings

Device connector, rear mounting - RC-07P1N8AE000 - 1594472

Schematic diagram



Dimensional drawing

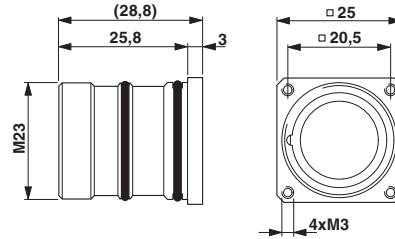

Dimensional drawing

