


TELUX™



19232

FEATURES

- High luminous flux
- Supreme heat dissipation: R_{thJP} is 90 K/W
- High operating temperature:
 $T_{amb} = -40\text{ °C to }+110\text{ °C}$
- Meets SAE and ECE color requirements for the automobile industry for color red
- Packed in tubes for automatic insertion
- Luminous flux, forward voltage and color categorized for each tube
- Small mechanical tolerances allow precise usage of external reflectors or lightguides
- Lead (Pb)-free device
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC
- Compatible with wave solder processes acc. to CECC 00802 and J-STD-020C
- ESD-withstand voltage: up to 2 kV according to JESD22-A114-B
- Automotive qualified



DESCRIPTION

The TELUX™ series is a clear, non diffused LED for applications where supreme luminous flux is required. It is designed in an industry standard 7.62 mm square package utilizing highly developed AlInGaP technology.

The supreme heat dissipation of TELUX™ allows applications at high ambient temperatures.

All packing units are binned for luminous flux, forward voltage and color to achieve the most homogenous light appearance in application.

SAE and ECE color requirements for automobile application are available for color red.

APPLICATIONS

- Exterior lighting
- Dashboard illumination
- Tail-, Stop - and Turn Signals of motor vehicles
- Replaces small incandescent lamps
- Traffic signals and signs

PRODUCT GROUP AND PACKAGE DATA

- Product group: LED
- Package: TELUX™
- Product series: standard
- Angle of half intensity: $\pm 45^\circ$

PARTS TABLE

| PART | COLOR, LUMINOUS FLUX | TECHNOLOGY |
|----------|--|-----------------|
| TLWR7900 | Red, $\phi_V = 2100\text{ mlm (typ.)}$ | AlInGaP on GaAs |
| TLWO7900 | Soft Orange, $\phi_V = 2100\text{ mlm (typ.)}$ | AlInGaP on GaAs |
| TLWY7900 | Yellow, $\phi_V = 1400\text{ mlm (typ.)}$ | AlInGaP on GaAs |

| ABSOLUTE MAXIMUM RATINGS¹⁾ TLWR7900, TLWO7900, TLWY7900 | | | | |
|---|---|------------|---------------|------------|
| PARAMETER | TEST CONDITION | SYMBOL | VALUE | UNIT |
| Reverse voltage ²⁾ | $I_R = 100 \mu A$ | V_R | 10 | V |
| DC Forward current | $T_{amb} \leq 85^\circ C$ | I_F | 70 | mA |
| Surge forward current | $t_p \leq 10 \mu s$ | I_{FSM} | 1 | A |
| Power dissipation | | P_V | 187 | mW |
| Junction temperature | | T_j | 125 | $^\circ C$ |
| Operating temperature range | | T_{amb} | - 40 to + 110 | $^\circ C$ |
| Storage temperature range | | T_{stg} | - 55 to + 110 | $^\circ C$ |
| Soldering temperature | $t \leq 5 s$, 1.5 mm from body preheat temperature 100 $^\circ C$ / 30 s | T_{sd} | 260 | $^\circ C$ |
| Thermal resistance junction/ambient | with cathode heatsink of 70 mm ² | R_{thJA} | 200 | K/W |
| Thermal resistance junction/pin | | R_{thJP} | 90 | K/W |

Note:

¹⁾ $T_{amb} = 25^\circ C$, unless otherwise specified

²⁾ Driving the LED in reverse direction is suitable for a short term application

| OPTICAL AND ELECTRICAL CHARACTERISTICS¹⁾ TLWR7900, RED | | | | | | |
|--|--|---------------------|------|----------|------|---------|
| PARAMETER | TEST CONDITION | SYMBOL | MIN | TYP. | MAX | UNIT |
| Total flux | $I_F = 70 mA$, $R_{thJA} = 200^\circ K/W$ | ϕ_V | 1500 | 2100 | 3000 | mlm |
| Luminous intensity/total flux | $I_F = 70 mA$, $R_{thJA} = 200^\circ K/W$ | I_V/ϕ_V | | 0.7 | | mcd/mlm |
| Dominant wavelength | $I_F = 70 mA$, $R_{thJA} = 200^\circ K/W$ | λ_d | 611 | 618 | 634 | nm |
| Peak wavelength | $I_F = 70 mA$, $R_{thJA} = 200^\circ K/W$ | λ_p | | 624 | | nm |
| Angle of half intensity | $I_F = 70 mA$, $R_{thJA} = 200^\circ K/W$ | φ | | ± 45 | | deg |
| Total included angle | 90 % of total flux captured | $\varphi_{0.9V}$ | | 100 | | deg |
| Forward voltage | $I_F = 70 mA$, $R_{thJA} = 200^\circ K/W$ | V_F | 1.83 | 2.2 | 2.67 | V |
| Reverse voltage | $I_R = 10 \mu A$ | V_R | 10 | 20 | | V |
| Junction capacitance | $V_R = 0$, $f = 1 MHz$ | C_j | | 17 | | pF |
| Temperature coefficient of λ_{dom} | $I_F = 50 mA$ | $T_C \lambda_{dom}$ | | 0.05 | | nm/K |

Note:

¹⁾ $T_{amb} = 25^\circ C$, unless otherwise specified

| OPTICAL AND ELECTRICAL CHARACTERISTICS¹⁾ TLWO7900, SOFT ORANGE | | | | | | |
|--|--|---------------------|------|----------|------|---------|
| PARAMETER | TEST CONDITION | SYMBOL | MIN | TYP. | MAX | UNIT |
| Total flux | $I_F = 70 mA$, $R_{thJA} = 200^\circ K/W$ | ϕ_V | 1500 | 2100 | 3000 | mlm |
| Luminous intensity/total flux | $I_F = 70 mA$, $R_{thJA} = 200^\circ K/W$ | I_V/ϕ_V | | 0.7 | | mcd/mlm |
| Dominant wavelength | $I_F = 70 mA$, $R_{thJA} = 200^\circ K/W$ | λ_d | 598 | 605 | 611 | nm |
| Peak wavelength | $I_F = 70 mA$, $R_{thJA} = 200^\circ K/W$ | λ_p | | 610 | | nm |
| Angle of half intensity | $I_F = 70 mA$, $R_{thJA} = 200^\circ K/W$ | φ | | ± 45 | | deg |
| Total included angle | 90 % of total flux captured | φ | | 100 | | deg |
| Forward voltage | $I_F = 70 mA$, $R_{thJA} = 200^\circ K/W$ | V_F | 1.83 | 2.2 | 2.67 | V |
| Reverse voltage | $I_R = 10 \mu A$ | V_R | 10 | 20 | | V |
| Junction capacitance | $V_R = 0$, $f = 1 MHz$ | C_j | | 17 | | pF |
| Temperature coefficient of λ_{dom} | $I_F = 50 mA$ | $T_C \lambda_{dom}$ | | 0.06 | | nm/K |

Note:

¹⁾ $T_{amb} = 25^\circ C$, unless otherwise specified



OPTICAL AND ELECTRICAL CHARACTERISTICS¹⁾ TLWY7900, YELLOW

| PARAMETER | TEST CONDITION | SYMBOL | MIN | TYP. | MAX | UNIT |
|--|---|---------------------|------|----------|------|---------|
| Total flux | $I_F = 70 \text{ mA}$, $R_{thJA} = 200 \text{ }^\circ\text{K/W}$ | ϕ_V | 1000 | 1400 | 2400 | mlm |
| Luminous intensity/total flux | $I_F = 70 \text{ mA}$, $R_{thJA} = 200 \text{ }^\circ\text{K/W}$ | I_V/ϕ_V | | 0.7 | | mcd/mlm |
| Dominant wavelength | $I_F = 70 \text{ mA}$, $R_{thJA} = 200 \text{ }^\circ\text{K/W}$ | λ_d | 585 | 592 | 597 | nm |
| Peak wavelength | $I_F = 70 \text{ mA}$, $R_{thJA} = 200 \text{ }^\circ\text{K/W}$ | λ_p | | 594 | | nm |
| Angle of half intensity | $I_F = 70 \text{ mA}$, $R_{thJA} = 200 \text{ }^\circ\text{K/W}$ | φ | | ± 45 | | deg |
| Total included angle | 90 % of total flux captured | $\varphi_{0.9V}$ | | 100 | | deg |
| Forward voltage | $I_F = 70 \text{ mA}$, $R_{thJA} = 200 \text{ }^\circ\text{K/W}$ | V_F | 1.83 | 2.1 | 2.67 | V |
| Reverse voltage | $I_R = 10 \text{ }\mu\text{A}$ | V_R | 10 | 15 | | V |
| Junction capacitance | $V_R = 0$, $f = 1 \text{ MHz}$ | C_j | | 32 | | pF |
| Temperature coefficient of λ_{dom} | $I_F = 50 \text{ mA}$ | $T_C \lambda_{dom}$ | | 0.01 | | nm/K |

Note:

¹⁾ $T_{amb} = 25 \text{ }^\circ\text{C}$, unless otherwise specified

LUMINOUS FLUX CLASSIFICATION

| GROUP | LIGHT FLUX (MLM) | |
|-------|------------------|------|
| | MIN | MAX |
| B | 1000 | 1800 |
| C | 1500 | 2400 |
| D | 2000 | 3000 |

Note:

Luminous flux is tested at a current pulse duration of 25 ms and an accuracy of $\pm 11 \%$.

The above type numbers represent the order groups which include only a few brightness groups. Only one group will be shipped on each tube (there will be no mixing of two groups on each tube).

In order to ensure availability, single brightness groups will be not orderable.

In order to ensure availability, single brightness groups will be not orderable.

In a similar manner for colors where wavelength groups are measured and binned, single wavelength groups will be shipped in any one tube.

In order to ensure availability, single wavelength groups will not be orderable.

COLOR CLASSIFICATION

| GROUP | DOM. WAVELENGTH (NM) | | | | | |
|-------|----------------------|------|------|------|-------------|------|
| | YELLOW | | RED | | SOFT ORANGE | |
| | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. |
| 0 | 585 | 588 | | | | |
| 1 | 587 | 591 | 611 | 618 | 598 | 601 |
| 2 | 589 | 594 | 614 | 622 | 600 | 603 |
| 3 | 592 | 597 | 616 | 634 | 602 | 605 |
| 4 | | | | | 604 | 607 |
| 5 | | | | | 606 | 609 |
| 6 | | | | | 608 | 611 |

Note:

Wavelengths are tested at a current pulse duration of 25 ms and an accuracy of $\pm 1 \text{ nm}$.

TYPICAL CHARACTERISTICS

$T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

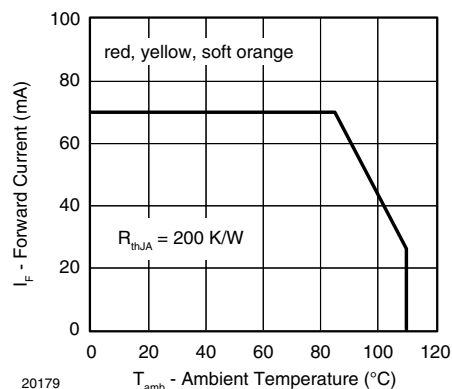


Figure 1. Forward Current vs. Ambient Temperature

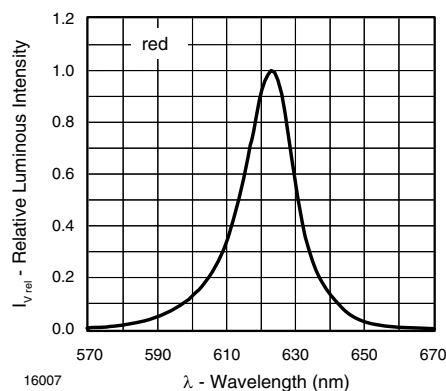


Figure 4. Relative Intensity vs. Wavelength

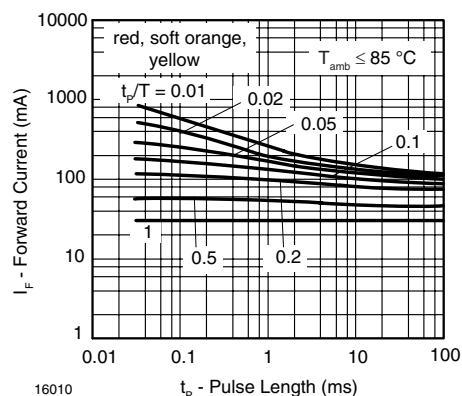


Figure 2. Forward Current vs. Pulse Length

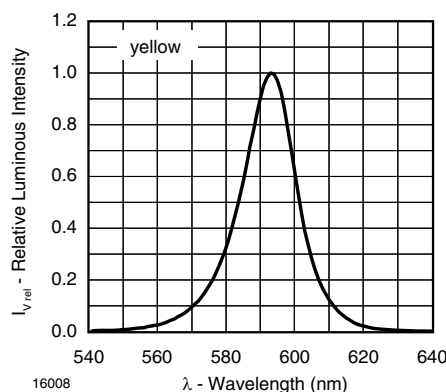


Figure 5. Relative Intensity vs. Wavelength

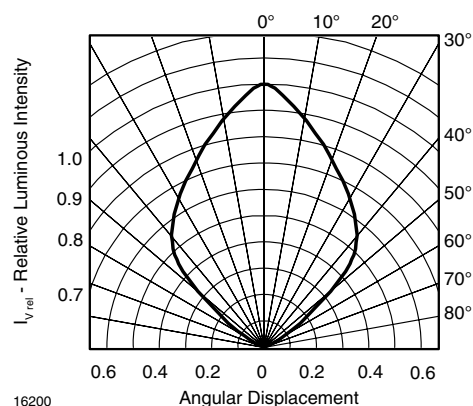


Figure 3. Rel. Luminous Intensity vs. Angular Displacement

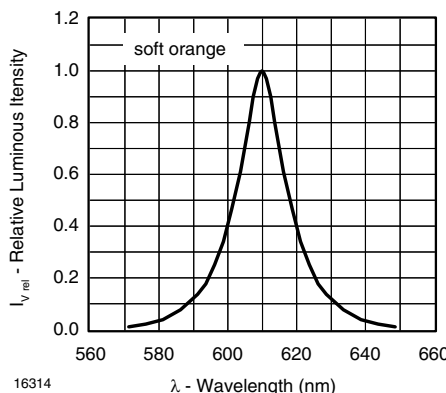


Figure 6. Relative Intensity vs. Wavelength

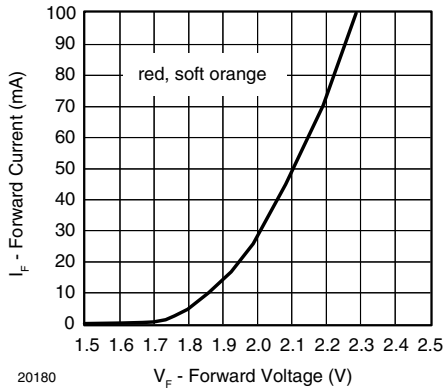


Figure 7. Forward Current vs. Forward Voltage

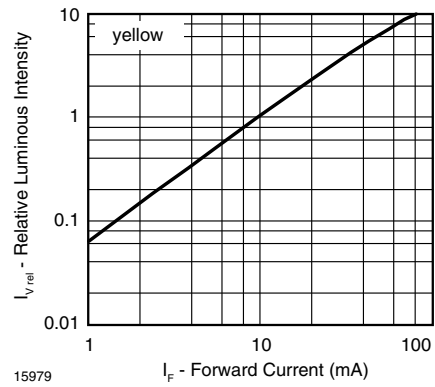


Figure 10. Relative Luminous Flux vs. Forward Current

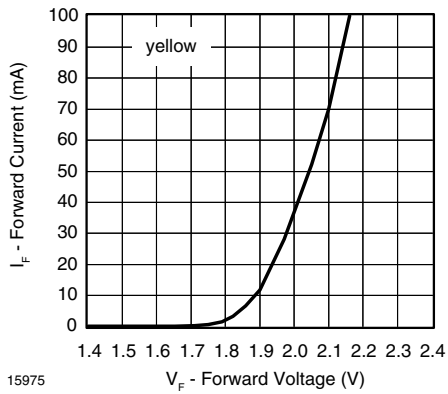


Figure 8. Forward Current vs. Forward Voltage

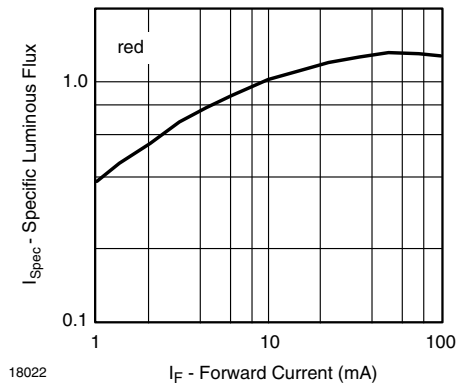


Figure 11. Specific Luminous Flux vs. Forward Current

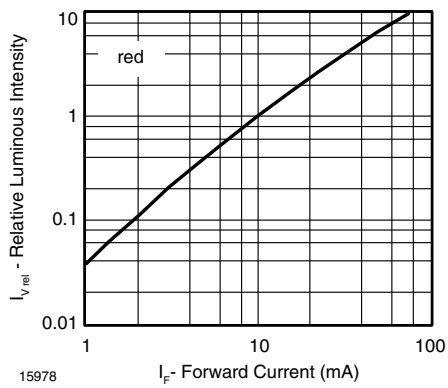


Figure 9. Relative Luminous Flux vs. Forward Current

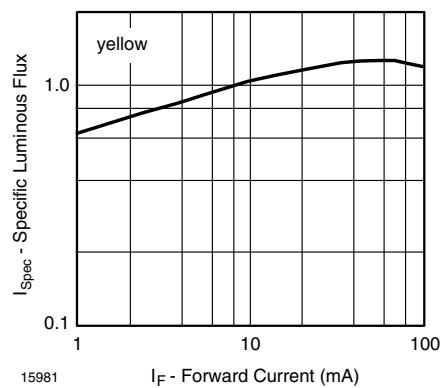


Figure 12. Specific Luminous Flux vs. Forward Current

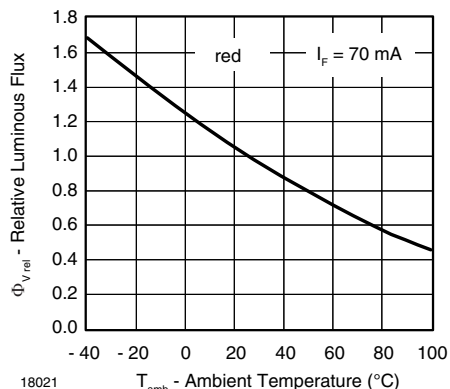


Figure 13. Rel. Luminous Flux vs. Ambient Temperature

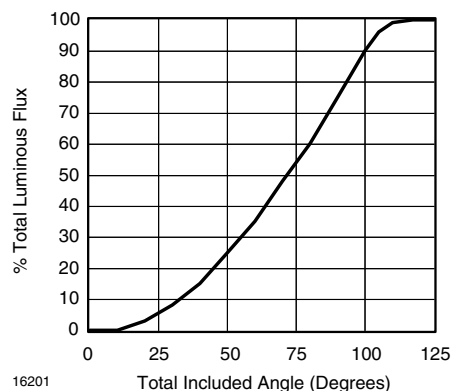


Figure 16. Percentage Total Luminous Flux vs. Total Included Angle for 90° Emission Angle

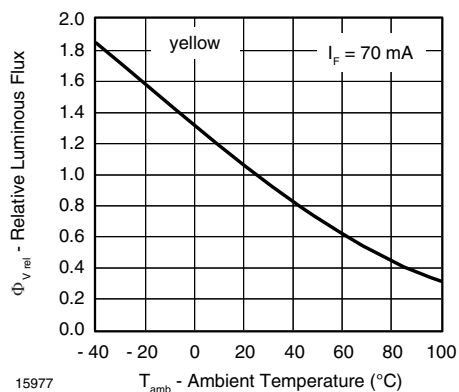


Figure 14. Rel. Luminous Flux vs. Ambient Temperature

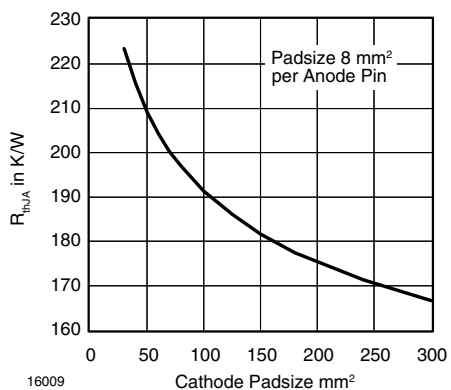


Figure 15. Thermal Resistance Junction Ambient vs. Cathode Padsizes

Cathode marking

Area not plane

A

1.6

1.45

1.32

0.4 ± 0.1

5.08 ± 0.3

7.62 ± 0.3

6.55

7.62 ± 0.3

SR1.65

7.8 ± 0.3

4.8 ± 0.3

2.85 ± 0.3

$0.75^{+0.2}_{-0.1}$

1.55 ± 0.2

5.08 ± 0.2


1.2 ± 0.1

0.6max.


5°

technical drawings according to DIN specifications

FAN FOLD BOX Dimensions in millimeters

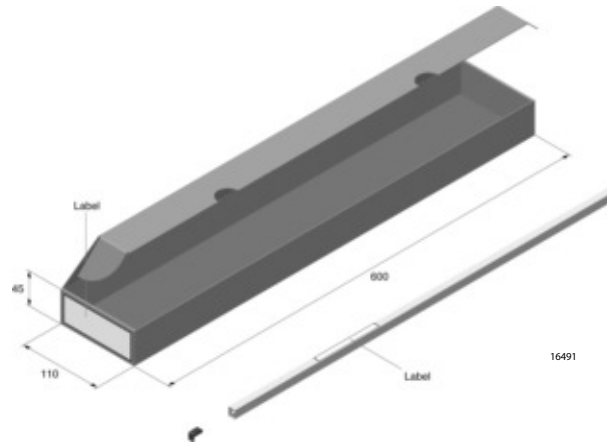


LABEL OF FAN FOLD BOX EXAMPLE:

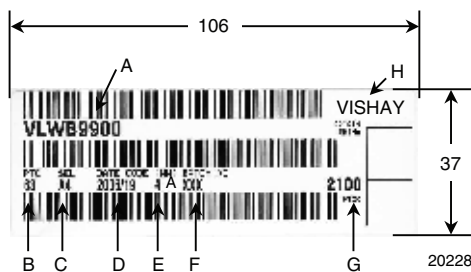

- A) Type of component
- B) Manufacturing plant
- C) SEL - selection code (bin):
e.g.: A = code for luminous intensity group
4 = code for color group
- D) Date code year/week
- E) Day code (e.g. 4: Thursday, A: early shift)
- F) Batch no.
- G) Total quantity
- H) Company code

EXAMPLE FOR TELUX TUBE LABEL Dimensions in millimeters

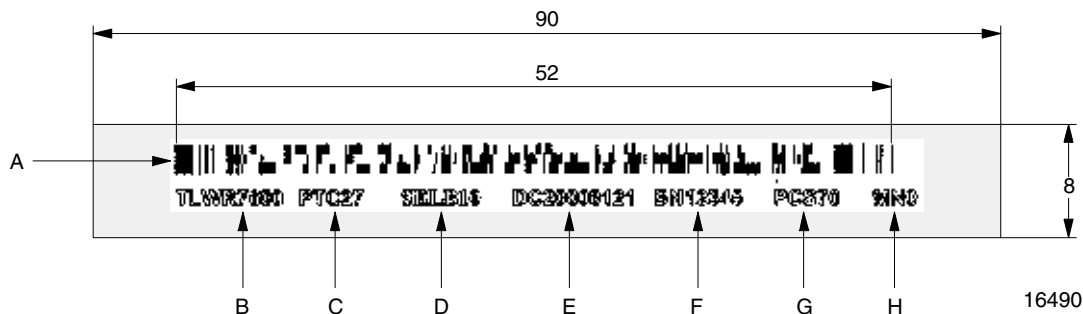

- A) Bar code
- B) Type of component
- C) Manufacturing plant
- D) SEL - selection code (bin):
Digit 1 - code for luminous flux group
Digit 2 - code for dominant wavelength group
Digit 3 - code for forward voltage group
- E) Date code
- F) Batch no.
- G) Total quantity
- H) Company code

TUBE WITH BAR CODE LABEL Dimensions in millimeters

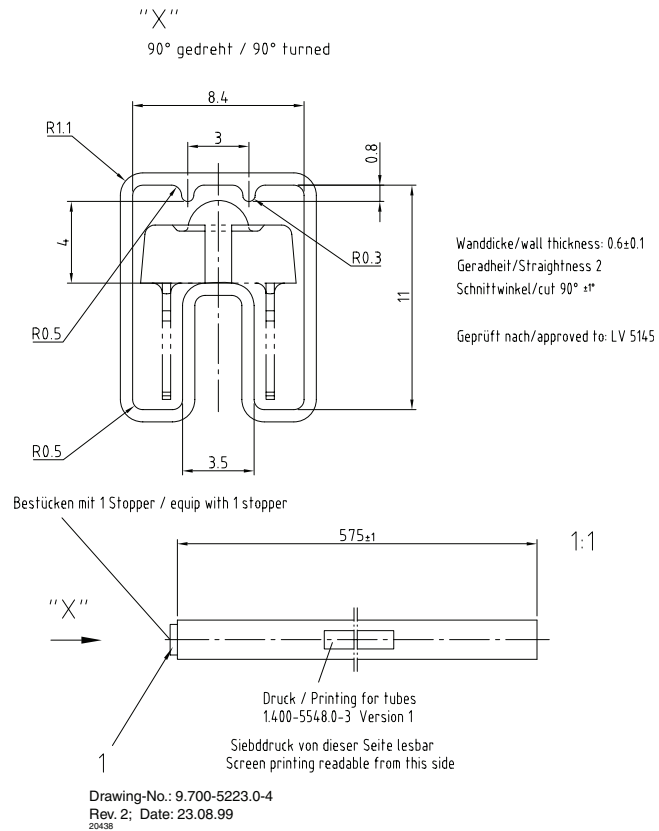


Figure 17. Drawing Proportions not scaled

Ozone Depleting Substances Policy Statement

It is the policy of Vishay Semiconductor GmbH to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

Vishay Semiconductor GmbH has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

Vishay Semiconductor GmbH can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

We reserve the right to make changes to improve technical design
and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay Semiconductors products for any unintended or unauthorized application, the buyer shall indemnify Vishay Semiconductors against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.