


Phillips pan head machine screws form H

BN 8092

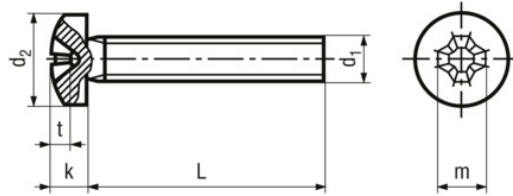

Standard	DIN 7985 A (Standard withdrawn), ~ISO 7045, ~UNI 7687, ~ČSN 021147
Additional information	All lengths fully threaded
Headform	Pan Head
Drive	Cross recess H (Phillips)
Thread	fully threaded
Material	Steel
Property class	4.8
Surface	zinc plated yellow

Article no.	d1	L	d2 max.	k max.	Phillips	m~	t min.	t max.
1170309	M2	3	4	1,72	1	2,5	1,1	1,4
1170317	M2	4	4	1,72	1	2,5	1,1	1,4
1170325	M2	5	4	1,72	1	2,5	1,1	1,4
1170341	M2	6	4	1,72	1	2,5	1,1	1,4
1170384	M2	8	4	1,72	1	2,5	1,1	1,4
1170406	M2	10	4	1,72	1	2,5	1,1	1,4
1170430	M2	12	4	1,72	1	2,5	1,1	1,4
1170457	M2	16	4	1,72	1	2,5	1,1	1,4
1188690	M2,5	6	5	2,12	1	2,7	1,3	1,6
1188704	M2,5	8	5	2,12	1	2,7	1,3	1,6
1188712	M2,5	10	5	2,12	1	2,7	1,3	1,6
1188720	M2,5	12	5	2,12	1	2,7	1,3	1,6
1276190	M3	4	6	2,52	1	3,1	1,7	2
1276204	M3	5	6	2,52	1	3,1	1,7	2

Article no.	d1	L	d2 max.	k max.	Phillips	m~	t min.	t max.
1276212	M3	6	6	2,52	1	3,1	1,7	2
1279823	M3	8	6	2,52	1	3,1	1,7	2
1280066	M3	10	6	2,52	1	3,1	1,7	2
1280236	M3	12	6	2,52	1	3,1	1,7	2
1290665	M3	16	6	2,52	1	3,1	1,7	2
1290770	M3	20	6	2,52	1	3,1	1,7	2
1290797	M3	25	6	2,52	1	3,1	1,7	2
1069845	M4	5	8	3,25	2	4,6	2,04	2,54
1320513	M4	6	8	3,25	2	4,6	2,04	2,54
1320548	M4	8	8	3,25	2	4,6	2,04	2,54
1320572	M4	10	8	3,25	2	4,6	2,04	2,54
1015400	M4	12	8	3,25	2	4,6	2,04	2,54
1015915	M4	16	8	3,25	2	4,6	2,04	2,54
1015974	M4	18	8	3,25	2	4,6	2,04	2,54
1016059	M4	20	8	3,25	2	4,6	2,04	2,54
1016407	M4	25	8	3,25	2	4,6	2,04	2,54
1033654	M4	30	8	3,25	2	4,6	2,04	2,54
1033689	M4	40	8	3,25	2	4,6	2,04	2,54
1033891	M4	50	8	3,25	2	4,6	2,04	2,54
3092862	M4	80	8	3,25	2	4,6	2,04	2,54
1365967	M5	6	10	3,95	2	5,3	2,77	3,27
1366157	M5	8	10	3,95	2	5,3	2,77	3,27
1366173	M5	10	10	3,95	2	5,3	2,77	3,27
1366254	M5	12	10	3,95	2	5,3	2,77	3,27
1366289	M5	16	10	3,95	2	5,3	2,77	3,27
1366912	M5	20	10	3,95	2	5,3	2,77	3,27
1366920	M5	25	10	3,95	2	5,3	2,77	3,27
1366939	M5	30	10	3,95	2	5,3	2,77	3,27
1367021	M5	40	10	3,95	2	5,3	2,77	3,27
1367390	M5	50	10	3,95	2	5,3	2,77	3,27
1367439	M6	10	12	4,75	3	6,8	3,03	3,53
1367447	M6	12	12	4,75	3	6,8	3,03	3,53
5522910	M6	16	12	4,75	3	6,8	3,03	3,53
1367471	M6	20	12	4,75	3	6,8	3,03	3,53
3092293	M6	25	12	4,75	3	6,8	3,03	3,53
1367501	M6	30	12	4,75	3	6,8	3,03	3,53